

A3002RU Multiple SSID settings

It is suitable for : **N100RE, N150RH, N150RT, N151RT, N200RE, N210RE, N300RT, N301RT , N300RH, N302R Plus, A702R, A850, A3002RU**

Application introduction: Solution about how to configure multiple SSID for TOTOLINK products.

STEP-1:

Connect your computer to the router by cable or wireless, then login the router by entering http://192.168.0.1 into the address bar of your browser.



Note:

The default access address varies depending on the actual situation. Please find it on the bottom label of the product.

STEP-2:

User Name and Password are required, by default both are **admin** in lowercase letter. Click **LOGIN**.

USER LOGIN

Forget Password?

👤

User Name


🔑

Password

LOGIN

STEP-3:

Please go to **Wireless 2.4GHz ->Multiple SSID 1** page, and check which you have selected. Select Enable , then Input your own **SSID and Pre-Shared Key**, then Click **Apply** and repeat this operation to **Multiple SSID 2 , Multiple SSID 3 and Multiple SSID 4.**

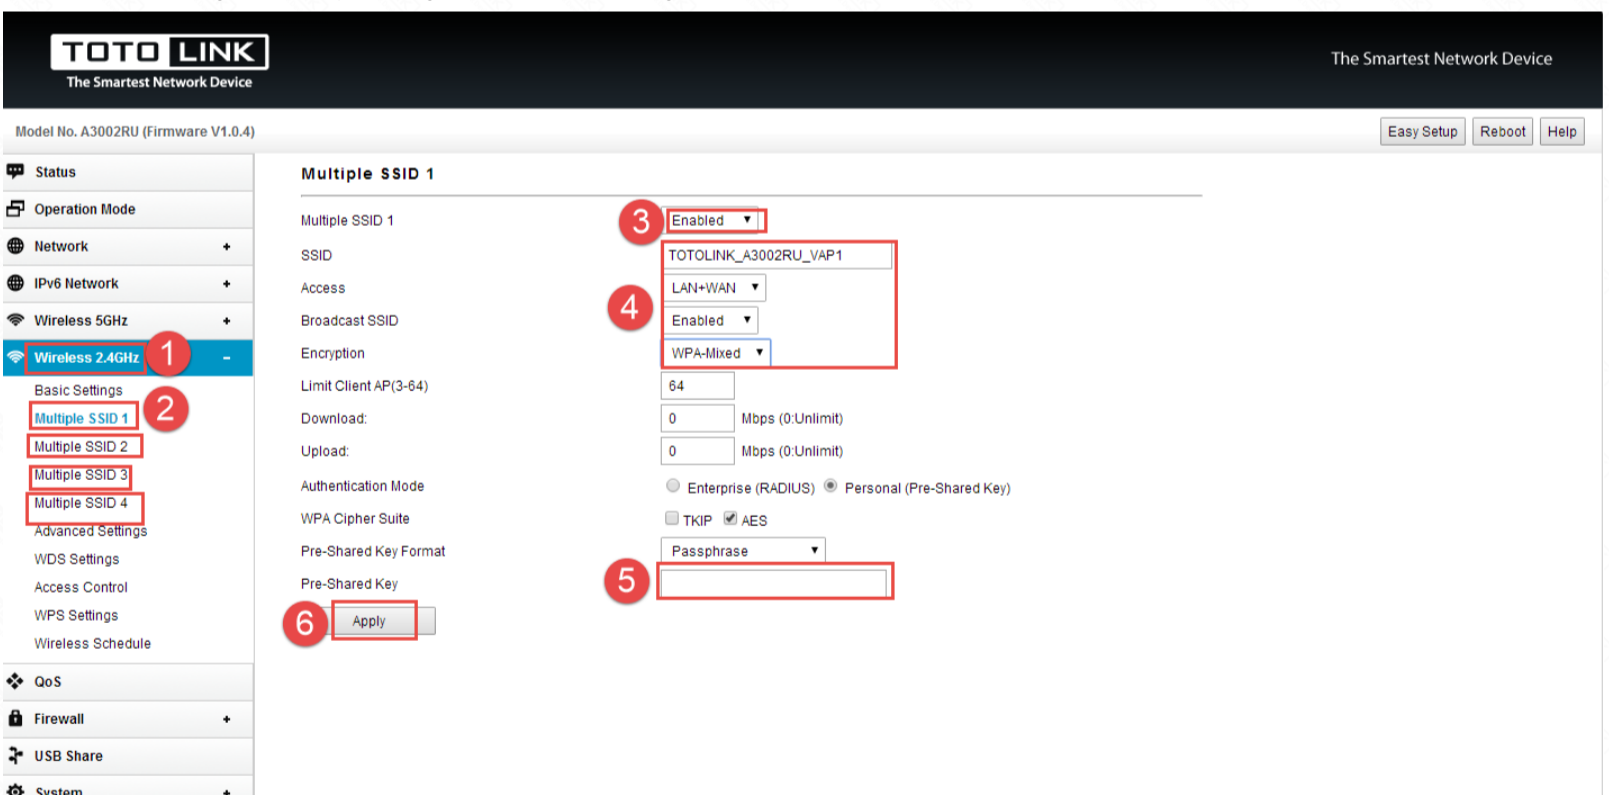

STEP-4:

Please go to **Wireless 5GHz ->Multiple SSID 1** page, and check which you have selected. Select Enable , then Input your own **SSID and Pre-Shared Key**, then Click **Apply** and repeat this operation to **Multiple SSID 2 , Multiple SSID 3 and Multiple SSID 4.**

