

www.totolink.net

The Smartest Network Device



AC1200 Wireless Dual Band Gigabit Router





300Mbps+867Mbps 11ac 1167Mbps



1GHz CPU



MU-MIMO

Overview

AC1200

Wireless Dual Band Gigabit Router

Model No. Q3

Q3 is a wireless dual band gigabit router which complies with the latest IEEE802.11ac Wave 2 standards, delivering wireless speed up to 1167Mbps. With the latest MU-MIMO and Beamforming technology, Q3 easily satisfies the demands from multiple users for web reading, media streaming and online gaming at the same time. And the full gigabit ports offer a larger capacity for the data forwarding via cable connection, greatly improving the Wi-Fi experience for the users.

> Features

- Complies with the IEEE 802.11ac Wave2 Wi-Fi standard.
- Simultaneous 867Mbps on 5GHz and 300Mbps on 2.4GHz for a total of 1167Mbps.
- Middle power design on both bands is perfect for long-distance wireless transmission.
- MU-MIMO technology allows to transfer data to multiple devices at the same time.
- USB port supports to share your files easily and charge your other devices.
- Four external 5dBi fixed antennas is perfect for long-distance wireless transmission.
- Beamforming technology improves directional signal transmission, improving the bandwidth efficiency.
- Full gigabit ports offer larger capability for data forwarding via cable connection
- Supports DHCP, Static IP, PPPoE, PPTP and L2TP broadband functions.
- Provides 64/128-bit WEP, WPA, WPA2 and WPA-PSK/WPA2-PSK security.
- Connects to a secure network easily by using WPS.
- QoS: Bandwidth Control based on IP address.
- Supports IP/Port filtering, MAC filtering, URL filtering and Port Forwarding.
- Universal Repeater and WDS function for easy Wi-Fi extension.
- Multi-SSID function enables users to create multiple wireless networks f or different groups.







Selling point

AC1200 Wireless Dual Band Router

Q3 complies with the IEEE802.11ac Wave2 Wi-Fi standard. It works on 2.4G and 5G simultaneously and delivers speeds up to 1167Mbps.




















Wave2 MU-MIMO and Beamforming technology

With the latest Wave2 MU-MIMO and Beamforming technology, Q3 supports to communicate with multiple devices at the same time and supports to transmit the signal to the wireless connected devices intensively, such as smart phones, tablets and laptops, thus improving the bandwidth efficiency and the Wi-Fi experience.

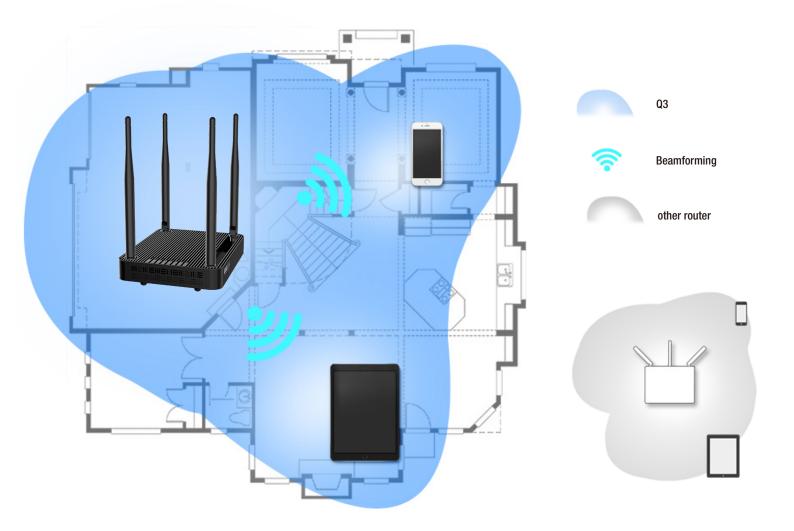

Specification

Hardware

Interface - 3 *1000Mbps LAN Ports - 1 *1000Mbps WAN Port

- USB 2.0


- DC Power Port

Power Supply - 12V DC/2A

Antenna - 4* 5dBi fixed antennas

Button - 1 * RST, 1* WPS

LED Indicator - 1 *CPU,1*Power, 1 *2.4GWireless, 1*5GWireless, 3 *LAN, 1*WAN, 1*USB 2.0

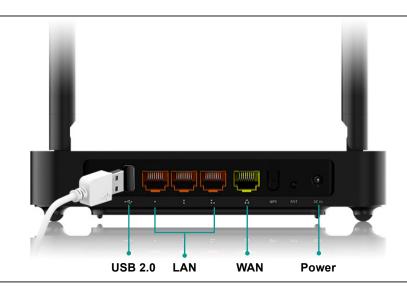

Wireless

Standards - IEEE 802.11ac, IEEE 802.11n, IEEE 802.11g, IEEE 802.11b, IEEE 802.11a

RF Frequency - 2.4~2.4835GHz

- 5.18~5.825GHz

Data Rate - 2.4GHz: Up to 300Mbps

- 5GHz: Up to 867Mbps

EIRP - 2.4GHz < 20dBm

- 5GHz < 20dBm

Wireless Security - 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK

Reception Sensitivity - 2.4G: 11b 11M: - 81dBm@8% PER

11g 54M: - 68dBm@10% PER

11n HT20 MCS7: -65dBm@10% PER

HT40 MCS7: -62dBm@10% PER

- 5G: 11a 54M: - 68dBm@10% PER

11n HT20 MCS7: -65dBm@10% PER HT40 MCS7: -62dBm@10% PER 11ac VHT80 MCS9: -51dBm@10% PER

Specification

Software

Basic Setting	- Status Summary
	- Internet Setup
	- Wireless Setup
	- Firmware Upgrade
Network	- Internet Setup
	- LAN Setup
	- DHCP Server Setup
Wireless	- Wireless Setup
Wifeless	- Wireless Setup - Wireless Multi-bridge
	- MAC Authentication
	MAC Addictitication
NAT/Routing	- Port Forwarding / Advanced NAT Setup / Routing Table
Firewall	- Firewall / Manage Access List
Utility	- VPN Setup / DDNS / WOL / Host Scan / Notice/ IPTV
· ·······,	
Traffic	- QoS Setup / Connection Info / Connection Control / Wired Port Setup / Switch Setup
System	- System Log
System	- Admin Setup
	- Firmware Upgrade
	- Misc Setup
USB/Service	- Device Management
	- Service Setup

Others

Package Contents	- Q3 Router *1 - Power Adapter *1 - Ethernet Cable *1 - Quick Installation Guide *1
Environment	- Operating Temperature: $0^{\circ}C \sim 50^{\circ}C$ (32 $^{\circ}F \sim 122^{\circ}F$) - Storage Temperature: $-40^{\circ}C \sim 70^{\circ}C$ (-40 $^{\circ}F \sim 158^{\circ}F$) - Operating Humidity: $10\% \sim 90\%$ non-condensing - Storage Humidity: $5\% \sim 90\%$ non-condensing

ZIONCOM (HK) TECHNOLOGY LIMITED

Copyright 2019 ZIONCOM (HK) TECHNOLOGY CO., LTD. All Rights Reserved.

Headquarter & R&D Center

7/F, Unit D, 4 Building Shenzhen Software Industry Base, Xuefu Road, Nanshan District, Shenzhen, Guangdong, China

Tel : +86-755-6136-3288 (Ext.867) | FAX : +86-755-6136-3344

Factory

Building A1 & A2 Lantian Technology Park, Xinyu Road, Xinqiao Henggang Block, Shajing Street, Baoan District, Shenzhen, Guangdong, China