

**TOTO LINK**

The Smartest Network Device

[www.totolink.net](http://www.totolink.net)



**SW1008P**

10-Port 10/100Mbps PoE Powered Switch

## ➤ Overview

# 10-Port 10/100Mbps PoE Powered Switch

Model No. **SW1008P**


The SW1008P is a 8-Port10/100Mbps PoE Powered+2 Gigabit Desktop Switch.

1-8 ports can detect connected devices automatically and deliver power & data to all IEEE802.3af/at compliant PoE powered devices through one Ethernet cable.

Meanwhile, it provides dual gigabit uplink port to meet the needs of more equipment cascading and access.

In addition, the SW1008P supports extended mode and VLAN management, can support long-distance transmission up to 250 meters after it is turned on.

It is ideal for outdoor surveillance and small AP network deployments.

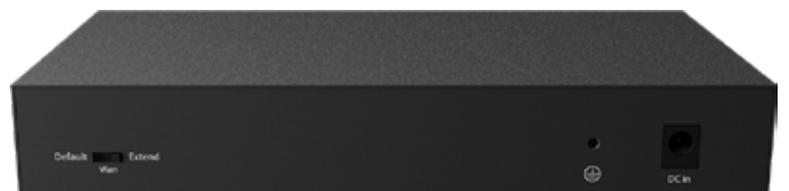

## ➤ Features

- 8-Port10/100Mbps+2 Gigabit Desktop Switch, meet the needs of more equipment cascading and access.
- Supports IEEE 802.3x flow control for Full Duplex mode and backpressure for Half Duplex mode.
- Mini iron box design supports desktop placement or wall mount.
- 16K entry MAC address table and automatic address learning.
- 6KV Port Lightning Protection
- One-key Extension Mode, Maximum support 250 meters transmission distance
- Support VLAN isolation to ensure your network security

# Specification

## General

Standard&Protocol	- IEEE 802.3、IEEE 802.3u、IEEE 802.3ab、IEEE 802.3af、IEEE 802.3at
Interface	- 8* 10/100Base-TX RJ45 Ports(Data/Power) - 2*10/100/1000Base-T RJ45 Port(Data)
Button	- 1* Extender Button
LED Indicator	- 10*Link/Act per device - 8*PoE per device - 2*1000M per device - 1*Power per device
Dimensions(L x W x H)	- 190 x 105 x 29mm
Port Lightning Protection	- 6KV
Backup Bandwidth	- 5.6Gbps
MAC Address Table	- 16K
PoE Supply Management	- Port 1 to Port 8 support IEEE802.3at/af PoE standard
PoE Through Pin	- 1 2 4 5 + , 3 6 7 8 -
Power Input	- AC: 100-240V ~ 50/60Hz - DC: 51V/1.17A & 51V/1.96A (Power Adapter)
Power Consumption	- In full configuration: <102W - PoE Max Power Supply: 99W
Ports Feature	- Standard: the switch functions as a common unmanaged switch and all the ports of the switch can communicate with each other. - Extend Mode: If the extend mode is enabled, the transmission distance of both power and data will extend up to 250m(10Mbps), this function can replace the extender and parts of the Fiber. It will extend the distance of the whole system and save the cost of the project.
Package Contents	- SW1008P Desktop Switch *1 - Power Adapter - Quick Installation Guide *1
Environment	- Operating Temperature: 0℃~50℃ (32℉~122℉) - Storage Temperature: -40℃~70℃ (-40℉~158℉) - Operating Humidity: 5%~95% non-condensing - Storage Humidity: 5%~95% non-condensing

## ZIONCOM ( HK ) TECHNOLOGY LIMITED

Copyright©ZIONCOM (HK) TECHNOLOGY CO., LTD. All Rights Reserved.

### Headquarter & R&D Center

7/F, Unit D, 4 Building Shenzhen Software Industry Base, Xuefu Road,  
Nanshan District, Shenzhen, Guangdong, China

Tel : +86-755-3686-1138 | FAX : +86-755-3686-1139

### Factory

Building A1 & A2 Lantian Technology Park, Xinyu Road, Xinqiao Henggang Block,  
Shajing Street, Baoan District, Shenzhen, Guangdong, China

Tel : +86-755-3686-1188 | FAX : +86-755-3686-1133

# SW1008P

10-Port 10/100Mbps PoE Powered Switch