

TOTO LINK
The Smartest Network Device

Quick Installation Guide


AC1200 Wireless Dual Band Router

Model: A702R

V4

Copyrights © TOTOLINK. All Rights Reserved. <http://www.totolink.net>
Information in this document is subject to change without prior notice.


1 Hardware Installation

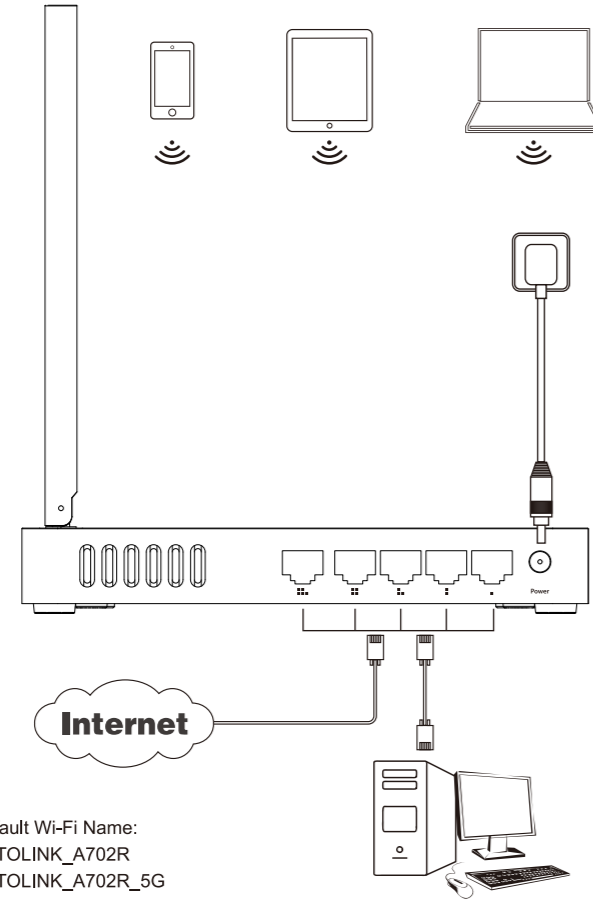

LEDs	Status	Description
Power	Off	The router is connected to the power source.
	On	The router is not connected to the power source.
Key for Security Lock	Off	The Key for Security Lock function is closed
	On	The solid on will continue for 1.5 min, during the solid on period this Wi-Fi will be opened and allow any device to access
	Blinking	The Key for Security Lock is activated. Strangers will not be able to connect to this Wi-Fi. The Key for Security Lock function is off by default. If you want to use it, you suppose to log in the management page then turn it on.
WAN/LAN 1-5	Off	Corresponding port disconnected.
	On	Corresponding port connected.
5G	Off	5G Wi-Fi failed or was turned off.
	On	5G Wi-Fi is working normally.
2.4G	Off	2.4G Wi-Fi failed or was turned off.
	On	2.4G Wi-Fi is working normally.
Ports and Buttons		Description
DC In		Connect to the Power Source.
WAN/LAN 1-5 Ports		Connect to the Internet/computers.
Key for Security Lock		Key for Security Lock: Press and hold for 1-3 seconds, the Key for Security Lock indicator will be solid on and you are able to connect to the router's Wi-Fi within 1.5 minutes.
RST Button		Reset: With the router powered on, press and hold the reset button for more than 5 seconds until all the lights are flashing, then go off and some lights go back to blink slowly during the process

2 Configure the router on Phone

1 Connect the Wi-Fi of the router with your phone. Find "TOTOLINK_A702R" or "TOTOLINK_A702R_5G" from the WLAN list on your Phone and choose one of them to connect.(P1)

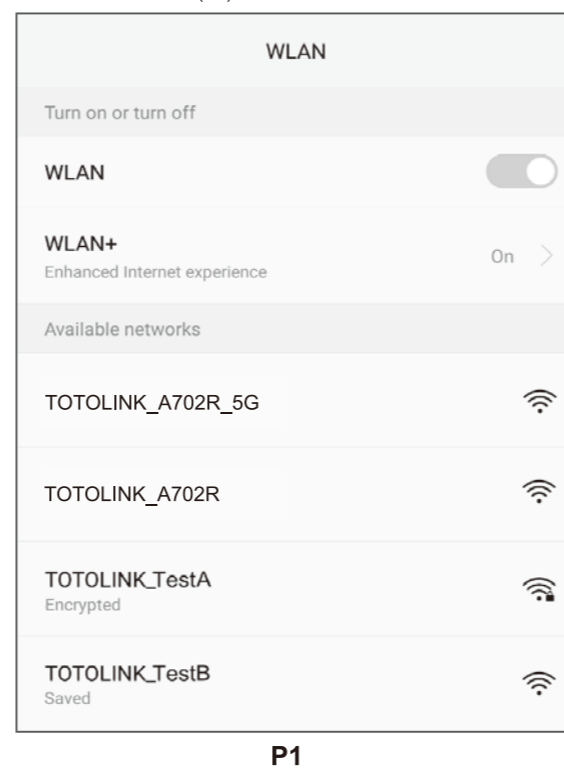

WAN Access	Description
Static IP	Input the IP address, Subnet Mask, Default Gateway, DNS from your ISP.
DHCP Client	No information required. Please confirm with your ISP if DHCP Client is supported.
PPPoE/Dual WAN Access PPPoE	Input Username and Password from your ISP.
PPTP/Dual WAN Access PPTP	Input Server Address, Username and Password from your ISP.
L2TP/Dual WAN Access L2TP	Input Server Address, Username and Password from your ISP.

P7


6 Wireless Setting. Create passwords for 2.4G and 5G Wi-Fi (Here users could also revise the default Wi-Fi name) and then click **Next**. If you want to turn on the Key for Security Lock function, please enable the **WiFi Safety Lock** (P8)

Note: The Key for Security Lock function is off by default. The Key for Security Lock indicator is blinking and can be solid on after press the Key for Security Lock button for 3 seconds. But strangers still can scrap your Wi-Fi. Only when you turn on the Key for Security Lock function on this management page, the Key for Security Lock function can be activated and strangers could not scrap your Wi-Fi.

7 IPTV Mode. Here users could enable or disable IPTV mode, and click **Next**.(P9)


8 The coming page is the Summary information for your setting. Please remember your Wi-Fi Name and Password, then click Done. It may take one minute to save the settings and restart. This time your phone will be disconnected from the Wi-Fi of the router.(P10)

9 Find the Wi-Fi name on the WLAN list of your Phone, choose the one you set just now and enter the correct password. Now, you could enjoy the Wi-Fi.

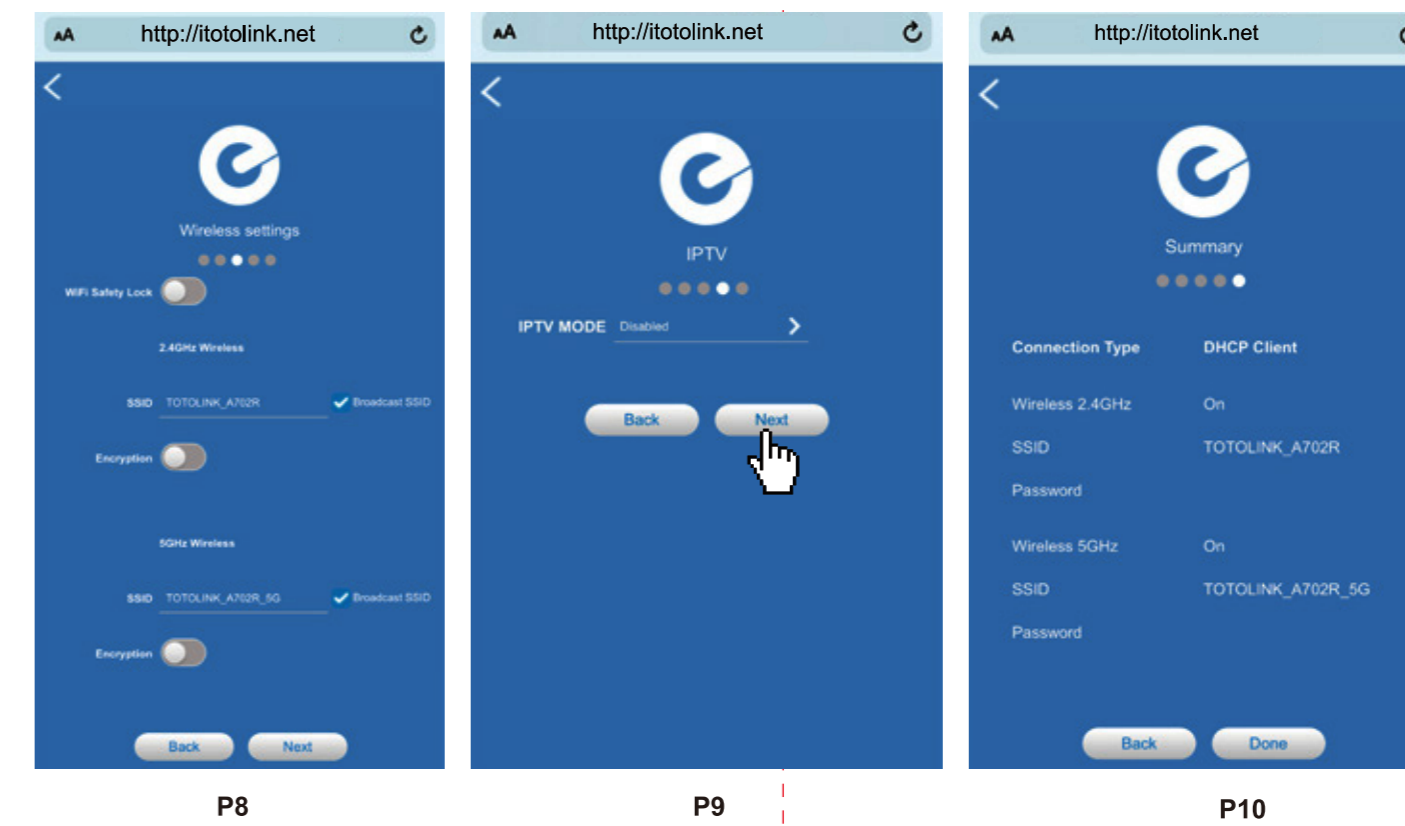


3 Key for Security Lock Function

(1) Please follow FAQs 1 to login this router's management page by Phone. Then please click System tools and go to **WiFi Safety Lock**. Here users are able to enable this Router's **Root WiFi Lock** or **Guest WiFi Lock** and click **save**. Then the Key for Security Lock Function is activated. Strangers could search for your Wi-Fi or know your Wi-Fi password, but they could not connect to your Wi-Fi.

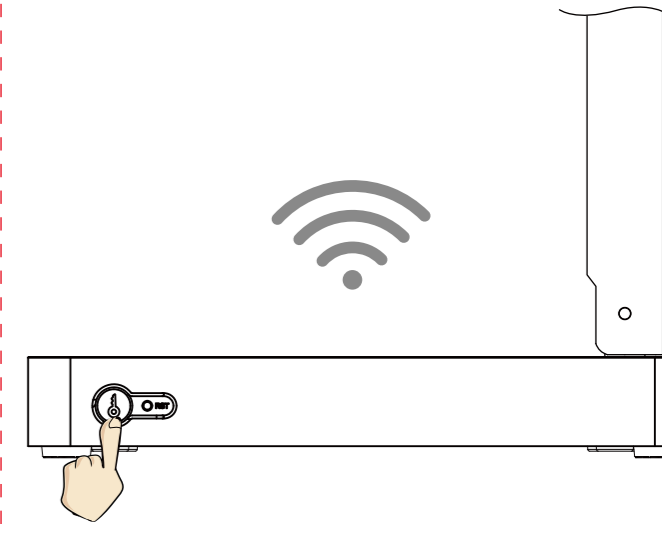


(2) Press the Key for Security Lock button for 3 seconds on Wi-Fi router.

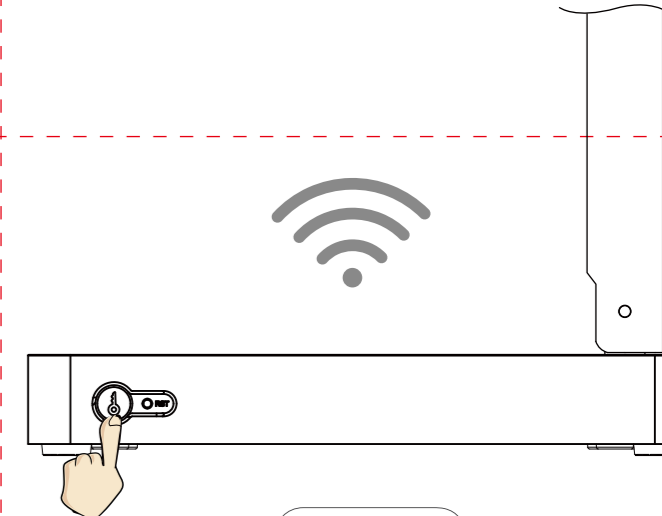

(3) Users could connect to the Wi-Fi of the router only when the Key for Security Lock indicator is solid on.

Note: This function is off by factory default, and its indicator is blinking relatively. The router's Wi-Fi password is not encrypted by default. The Key for Security Lock indicator can be solid on after pressing the Key for Security Lock button for 3 seconds. But strangers still can scrap your Wi-Fi.


2 Input <http://totolink.net> on any web browser, and then enter **admin** for the password on the coming page, then click **Login**.(P2)

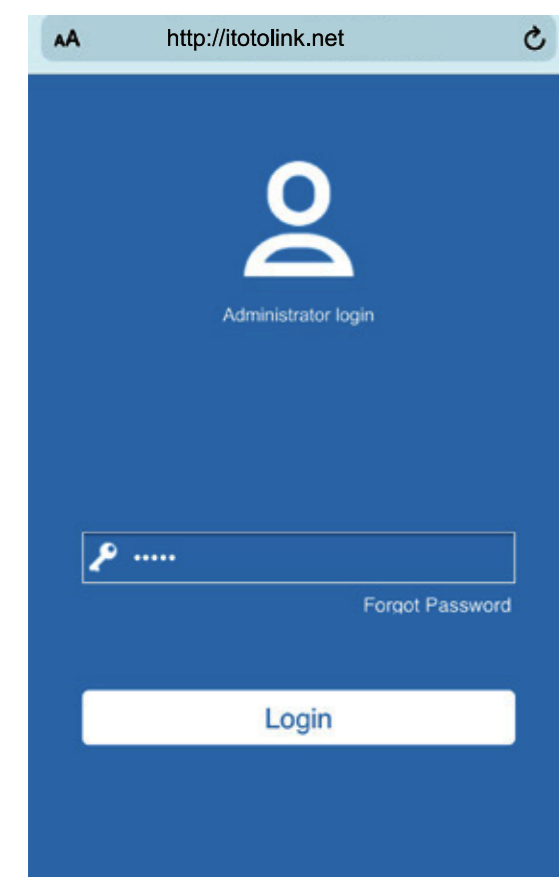



3 Click **Quick Setup** on the upper right corner. (P3)



4 Take Operation Mode: Gateway as an example, then click **Next**.(P4)

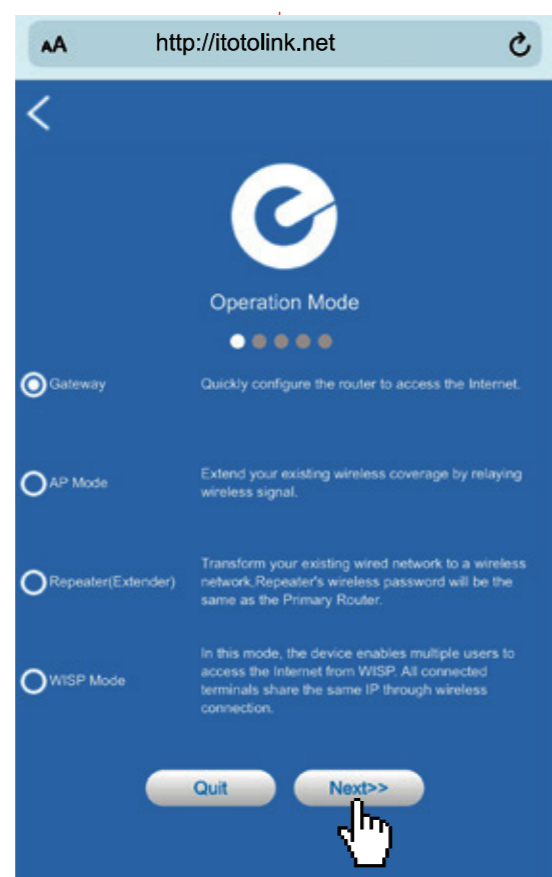

5 Internet Setting. Choose a suitable WAN Access connection type from the list and fill in the information required, then click **Next**.(P5/P6/P7)

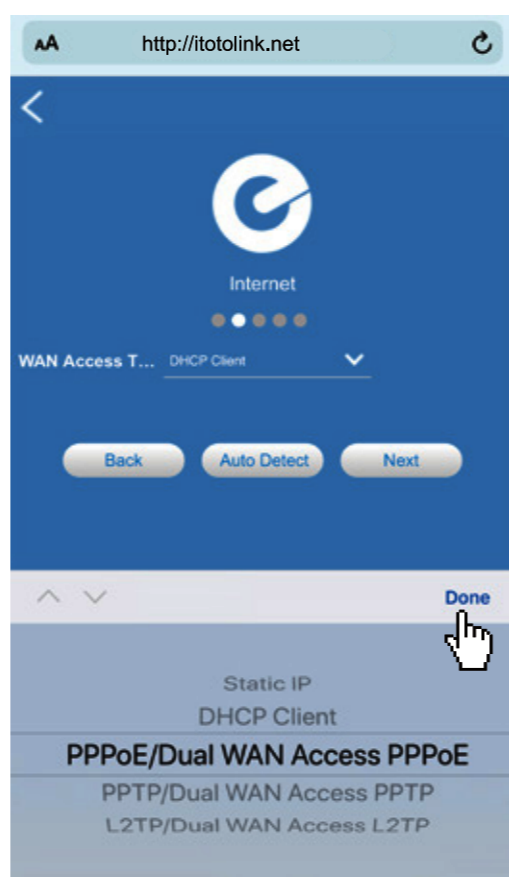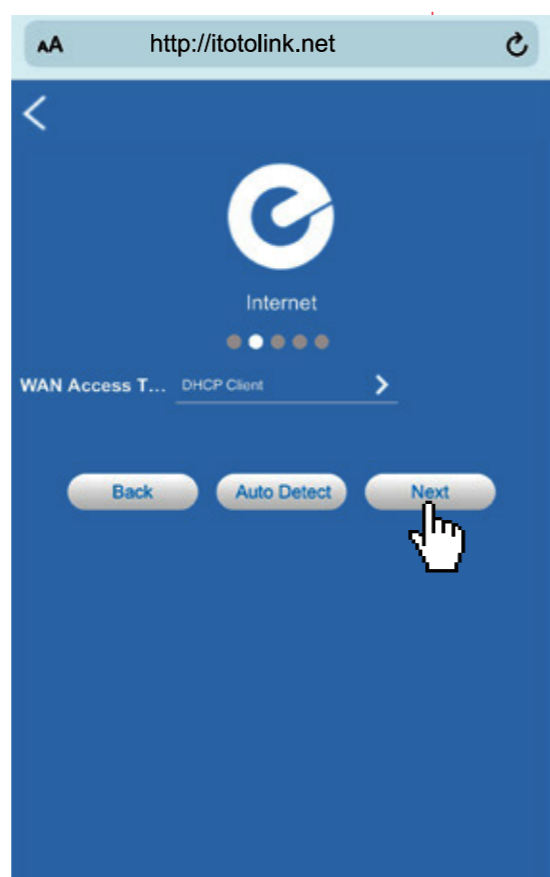

4 FAQs (Frequently Asked Questions)

1.How to login this router's management page?

- 1) Login the router's management page by Phone
Please connect your Phone to this router's Wi-Fi and enter <http://totolink.net> on any web browser, and then enter **admin** for the password on the coming page, then click **Login**.
- 2) Login the router's management page by computer
Please connect your computer to the router by an Ethernet cable and enter <http://totolink.net> on any web browser, and then enter **admin** for the password on the coming page, then click **Login**.

2. Unable to open the router's login page on the browser?

Please check if your Phone has connected to the router and make sure you have entered the correct default gateway <http://totolink.net>

3. How to reset the router to factory default settings?

Keep the router powered on, then press and hold the RST button(for more than 5 seconds) until the Key for Security Lock indicator becomes quickly blinking.

4. How to do if forgetting the router's Login User Name and Password?

Reset the router to the factory default settings. The User Name and Password would be resumed to **admin**.

5. How to do if forgetting the password of the Wi-Fi?

Please connect one of ports on the router to the computer with RJ45 cable, except the port which had worked as a WAN port, connecting to the modem or internet. And then open any web browser to log in the router to check or revise the present Wi-Fi password in the **Basic—Wireless Network**. (Please ensure your computer has been set to "Obtain an IP address automatically" in advance.)

6.How to turn off the Key for Security Lock Function?

Please follow the FAQs 1 to login the router's management page. Here take Login the router's management page by Phone as example. Please click **Basic** and go to **Wireless Network**. Here users are able to disable this Router's **Root WiFi Lock** or **Guest WiFi Lock** and click **save**. Then the Key for Security Lock Function is off.

FCC warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference
- (2) This device must accept any interference received, including interference that may cause undesired operation.

RF Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with minimum distance 20cm between the radiator& your body.

Manufacturer: ZIONCOM ELECTRONICS (SHENZHEN) LTD.
Address: Room 702, Unit D, 4 Building Shenzhen Software Industry Base, Xuefu Road, Nanshan District, Shenzhen, Guangdong, China