

How to setup Multi-SSID for the router?


It is suitable for: **N150RA, N300R Plus, N300RA, N300RB, N300RG, N301RA, N302R Plus, N303RB, N303RBU, N303RT Plus, N500RD, N500RDG, N505RDU, N600RD, A1004, A2004NS, A5004NS, A6004NS**

Application:

Multi-SSID allows users to create network name with different priority for clients or friends accordingly. It is good for access control and your data privacy.

STEP-1: Connect your computer to the router

1-1. Connect your computer to the router by cable or wireless, then login the router by entering http://192.168.1.1 into the address bar of your browser.




Note: The default IP address of TOTOLINK router is 192.168.1.1, the default Subnet Mask is 255.255.255.0. If you can't log in, Please restore factory settings.

1-2. Please click **Setup Tool** icon to enter the router's setting interface.




1-3. Please login to the Web Setup interface (the default user name and password is admin).

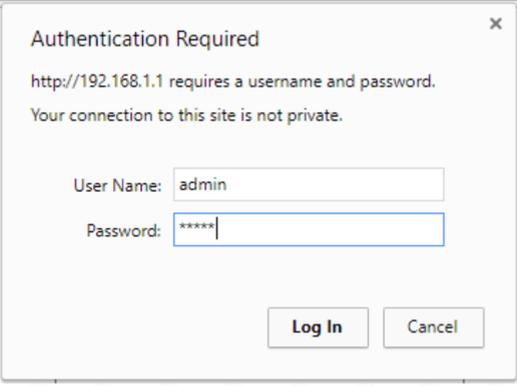

Now you can log in the router's interface to set up.

STEP-2: Disable SSID broadcast


2-1. Click **Advanced Setup->Wireless->Multiple BSS** on the navigation bar on the left.

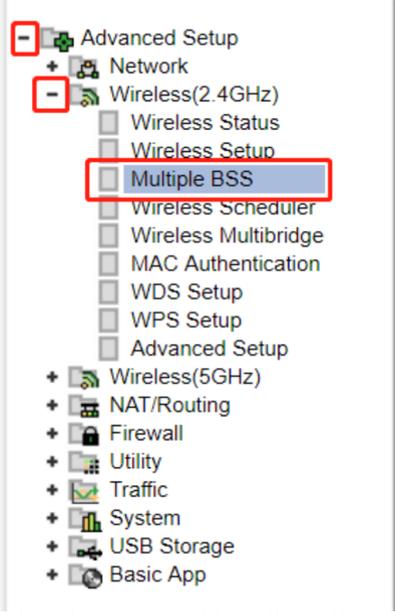

STEP-3:

Fill in the information about SSID in the blank, and then click Add button to apply modification.

- **SSID:** network name
- **SSID Broadcast:** Select hidden SSID
- **Access Policy:**
 - a. Allow all: allow users share files or other motion by external network and LAN.
 - b. Only for Internet: Only allow users hare files or other motion by external network.
- **Encryption:** Set encryption key for the wireless network.

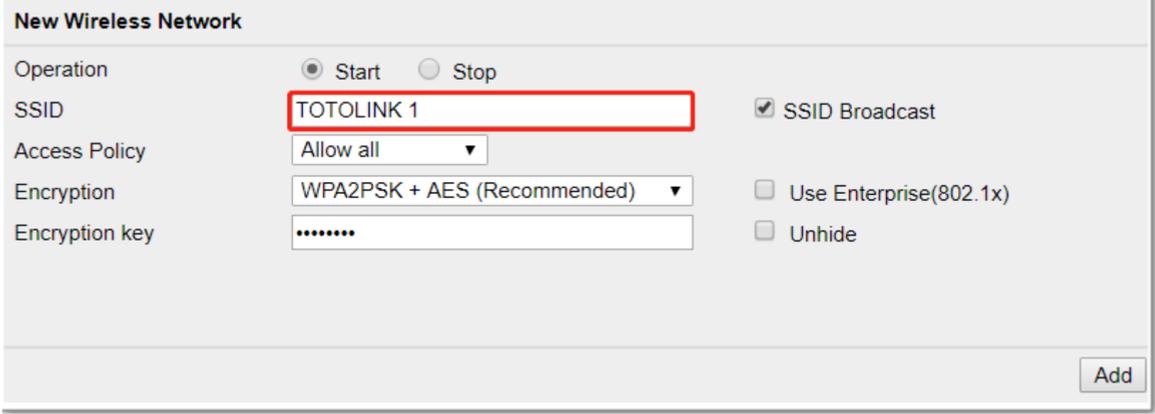

STEP-4:

After adding other SSIDs you can see the information in the Wireless Network Information bar.

