


A3002RU-V2 Quick Installation Guide

It is suitable for : A3002RU-V2

Installation Diagram



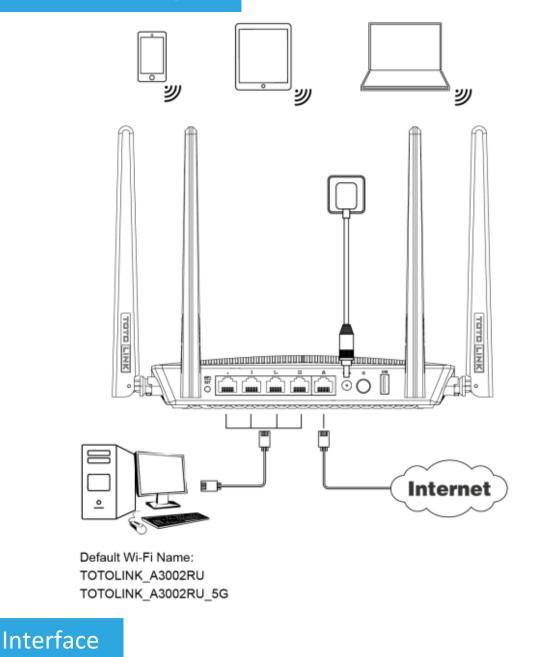


WLAN	
Turn on or turn off	
WLAN	
WLAN+ Enhanced Internet experience	on >
Available networks	
TOTOLINK_ A3002RU	(h-
TOTOLINK_ A3002RU_5G	(((•
TOTOLINK_TestA Encrypted	(IC
TOTOLINK_TestB Saved	((r-

Find TOTOLINK_A3002RU or TOTOLINK_A3002RU_5G on the WLAN list of your Phone, and choose to connect. Then any Web browser on your Phone and enter http://itotolink.net on the address bar.

STEP-2 :

Input admin for both User Name and Password on the coming page, then click Login.

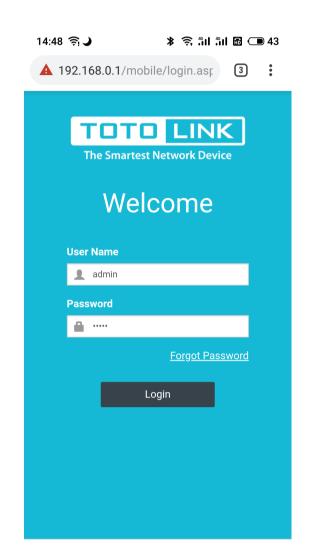

STEP-3 :

Click Quick Setup on the coming page.

14:55 🛜 🌙	¥ 🛜 511 511 🖻 🗩 42
	Ċ

TOTOLINK Router Setting



STEP-4 :

Internet Setting. Choose a suitable WAN Connection type from the list, and fill in the information required.

WAN Setting		AN Setting * WAN Setting			* WAN Se	etting		
PPPoE	Dynamic IP	Static IP	PPPoE	Dynamic IP	Static IP	PPPoE	Dynamic IP	Static IF
Please enter by your ISP	User Name and Pass	word provided	WAN Status			Please comp	lete below information	
User Name			IP Address			IP Address		
			Subnet Mask			Subnet Mask		
Password		۲	Gateway			Gateway		
-			DNS Server			DNS Server		
Bac		Next						
			Back		Next	Bac		Next

STEP-5 :

Wireless Setting. Create passwords for 2.4G and 5G Wi-Fi (Here users could

STEP-6 :

It takes several seconds to save the settings and then your router will restart automatically.

also revise the default Wi-Fi name) and then click Next.

This time your Phone will be disconnected from the router. Please back to the WLAN list of your phone to choose the new Wi-Fi name and input the correct password. Now, you could enjoy the Wi-Fi.

14:56 🤶 🔋 🔋 🔋 ាំរា ាំរា 🖻 💷 42	14:57 →
* Wi-Fi Setting	⊕ TOTOLINK ⊖
2.4G Wi-Fi Setting Network Name(SSID) TOTOLINK_A3002RU	
Password 88888888 ()	Router Setup Complete Since Wi-Fi setting changed, you device will lose
5G Wi-Fi Setting Network Name(SSID)	connevtion to the router. Please reconnet. 2.4GHz Wireless
TOTOLINK_A3002RU_5G Password	Network TOTOLINK_A3002RU Name(SSID) Password 88888888
88888888 💿	5GHz Wireless
Length range is 8-63	Network TOTOLINK_A3002RU_5G Name(SSID) Password 88888888
Back Finish	
$\langle \rangle \equiv \triangle$ 1	$\langle \rangle \equiv \triangle$ 1

Method Two: login via PC

STEP-1:

Connect your computer to the router by cable or wireless. Then run any Web browser and enter http://itotolink.net in the address bar.

STEP-2:

Set a new login password for the device, it is recommended to set the password with alphanumeric characters and then press Install.

TOTO LINK The Smartest Network Device		The Smartest Network Device
	New Login Password	
	Skip	
	New Password Length range is 6-15	
	Confirm Password Length range is 6-15	
	Set Up	
	Note: Set a new login password to prevent the router from being compromised	
	Copyright(C)2019 TOTOLINK Ltd, All Rights Reserved	

STEP-3:

Enter admin for User name, then enter new password in step 2 or admin, type the verification code then press LOGIN.

TDTD LINK The Smartest Network Device			The Smartest Network Device
USER	LOGIN		
		Forget Passw	ord?
1	User Name	admin	
P	Password		
v	Verification Code	1JRP	
	1J RP	2	
	Log	gin Eng	
Waiting for 192.168.0.1	Copyright(C)2019 TOTOLIN	K Ltd, All Rights Reserved	

STEP-4:

Click on "Auto Detect" to detect the Wan Type in your network.

TOTO LINK The Smartest Network Device			The Smartest Net	work Device
Model No. A3002RU (Firmware V2.0.0)		Gateway •	Advanced Setup	Auto •
Easy Setup Quickly configure the router to access t	he Internet.			
Connect Status Connect Status	DHCP Connected			
Internet Wan Type	DHCP Client	And Sm		
SSID 5GHz				
SSID Password	TOTOLINK_A3002RU_5G (length range is t	3-63)		
SSID 2.4GHz				
SSID Password	TOTOLINK_A3002RU (length range is a	3-63)		
	Disabled V			
Apply Refresh				
	Copyright(C)2019 TOTOLINK Ltd, All Rights Reserved			

STEP-5:

Click on "Auto Detect" to detect the Wan Type in your network.

TOTO LINK The Smartest Network Device				The Smartest Net	work Device
Model No. A3002RU (Firmware V2.0.0)			Gateway •	Advanced Setup	Auto 🔻
Easy Setup Quickly configure the router to access	the Internet.				ŕ
Connect Status Connect Status	DHCP Connected				
Internet Wan Type	DHCP Client •	Auto Detect			
SSID 5GHz SSID Password	TOTOLINK_A3002RU_5G	length range is 8-63)		
SSID 2.4GHz SSID Password	TOTOLINK_A3002RU	length range is 8-63)		
	Disabled V				
Apply Refresh	Copyright(C)2019 TOTOLINK Ltd, All Righ	its Reserved			