



Quick Installation Guide

Gigabit Uplink Unmanaged Switch


Suitable for: SW24G2

Copyright © TOTOLINK, All rights reserved.
Information in this document is subject to change without prior notice.
For more information, please go to www.totolink.net

1 Before Installation

Checking Package Contents

- 1* 24+2 Ports Gigabit Uplink Unmanaged Switch
- 1* Power Cord
- 1* Quick Installation Guide
- 2* Mounting Brackets and the fittings

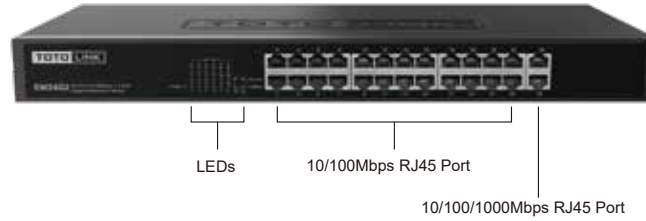

LED Indicators


LED Indicator	Status	Description
POWER	On	The switch is powered on
	Off	The switch is powered off or power supply is abnormal
Link/Act (1-26)	On	The corresponding indicator lights green when connected to other device, flashes green during data transfer
	Off	No device is connected to the corresponding port
1000Mbps	On	The corresponding port is running at 1000Mbps
	Off	There is no device linked to the corresponding port or the port is running at 10Mbps or 100Mbps

3 Specifications

Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x
Interface	24*10/100Mbps +2-Port 10/100/1000Mbps auto-negotiation RJ-45 Ports (Auto MDI/MDIX)
Network Media	10BASE-T: UTP Cat 3, 4, 5 cable 100BASE-TX/1000BASE-T: UTP Cat 5, 5e or above cable
Power Supply	100~240VAC, 50/60Hz, 0.6A
Backup Bandwidth	8.8Gbps
MAC Address Table	16K
MAC Address Learning	Auto-learning, Auto-aging
Transmission Method	Store-and-forward
LED	1* Power, 26*LANs, 2*1000Mbps
Operating Temperature	0°C~40°C (32°F~104°F)
Storage Temperature	40°C~70°C (-40°F~158°F)
Operating Humidity	10%~90%RH Non-condensing
Storage Humidity	5%~90%RH Non-condensing
Dimensions(L x W x H)	440 x 180 x 44mm

Hardware Installation

Refer to the application scene graph below

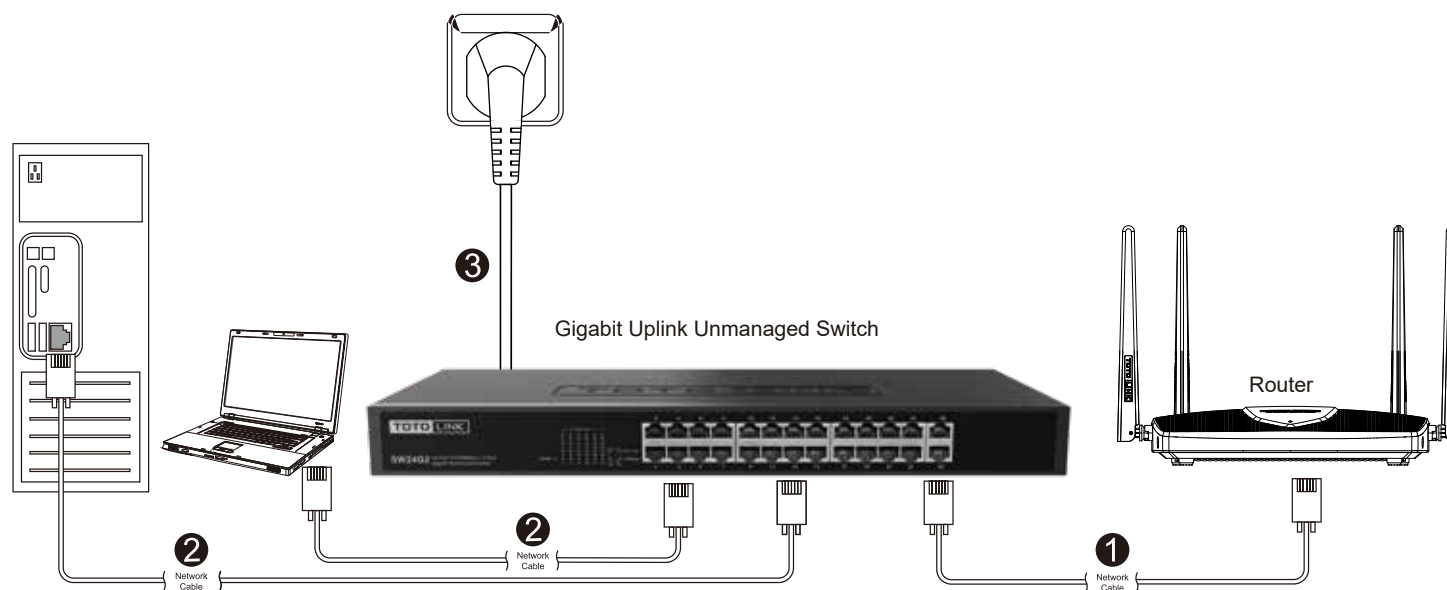

- 1 Use Ethernet cable to connect router to Switch (LAN port to LAN port)
- 2 Use Ethernet cable to connect PC or Laptop's RJ45 port to Switch
- 3 Plug one end of the power cord into switch's AC power jack and then other end to wall socket.

! Notice

1. The switch should be used indoor only.
2. Use the Power cord comes with the switch.
3. Set the device on a flat surface strong enough to support the entire weight of the device with all fittings.
4. Don't place heavy objects on the switch.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off

Caution

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Manufacturer: ZIONCOM ELECTRONICS (SHENZHEN) LTD.
Address: Room 702, Unit D, 4 Building Shenzhen Software Industry Base, Xuefu Road, Nanshan District, Shenzhen, Guangdong, China